
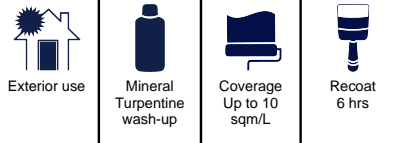


Woodcare®

Decking Oil

Product Base Code: WEDO

	Product Description	
	<p>Haymes Paint Woodcare Decking Oil is an oil-based timber finish that penetrates surfaces to preserve exterior timber. It creates a protective barrier to repel water and protect timber from mould, algae and UV damage. Tintable to a wide range of colours, Decking Oil is ideal for use as an exterior timber stain.</p>	
	Key Features & Benefits	
	Will not crack or peel	Weathers naturally
	Penetrates and preserves	Nourishes timber to guard against cracking and splitting
	Mould and algae resistant	To protect the timber from early deterioration

Where to use	
Substrate :	Timber-Decking, Timber-Exterior and Timber-Weatherboard
Exterior :	Decking, Fencing Timber, Outdoor Furniture, Gates, Pergolas, Verandas, Steps, Screens and Walkways

Typical Properties	
Colour	Merbau, Natural and Stain Tint
Application method	Brush, lambswool applicator
Gloss level	Matt
Clean-up	Mineral Turpentine
Dry time - recoat	6 hours
Coverage	Up to 10 sqm/L dependent upon surface porosity, profile and method of application.
Sizes	1L, 4L, 10L
VOC	620 g/L
Volume solids	20%
Film build wet	100 µm
Film build dry	20 µm

Precautions

- Do NOT apply if ambient temperature is less than 10°C , greater than 35°C or if temperature will drop below 10°C during the drying period.
- All times quoted assume ambient conditions 25°C and 50% relative humidity. At cooler temperatures or higher humidity, drying times will be extended.
- Do NOT apply if rain is expected within 48 hours of application, allow a longer period if temperature conditions are continuously below 20°C .
- Do NOT apply to hot surfaces or in direct sunlight.
- Do NOT overwork the product. Repeatedly going over the same area may cause unattractive brush marks and result in an uneven finish.
- Soak all cloths with traces of paint or solvent in water to prevent spontaneous combustion.

Surface Preparation

General surface preparation	All surfaces must be clean, bare, dry and free of wax, grease and other surface contaminants. If mould is present, treat the surface with a mould remover to effectively eliminate the mould spores. All traces of mould must be removed prior to application.
New timber	Prepare the timber with Haymes Woodcare Rapid Prep following application instructions to remove surface tannins and extractives to ensure adequate penetration and adhesion of the coating. If the timber has been weathered for 6 weeks or longer, Haymes Woodcare Wood Cleaner must be used in place of Rapid Prep. Allow the timber to dry. Conduct a water penetration test, as outlined below, to determine whether the timber is ready for coating.
Recoating existing Decking Oil	Thoroughly clean the surface with Haymes Woodcare Wood Cleaner. Allow to dry thoroughly. Apply 1 coat of Decking Oil following application instructions. If any areas have worn back to bare timber or show signs of deterioration, sand the surface to completely remove the coating before cleaning. Apply 2 coats of Decking Oil following application instructions.
Previously varnished or coated timber	Remove all previous coatings by sanding or stripping. Clean the surface with Haymes Woodcare Wood Cleaner following application instructions. Allow to dry thoroughly.
Previously stained or oiled timber	Clean the surface with Haymes Woodcare Wood Cleaner and allow to dry thoroughly. Conduct an adhesion test [1], followed by a compatibility test [2] in multiple areas as outlined below. Conduct a water penetration test , as outlined below, to determine whether the timber is ready for coating.
Weathered or greyed timber	Clean the surface with Haymes Woodcare Wood Cleaner and allow to dry thoroughly. If the timber is severely weathered, the timber should be sanded first and then cleaned with Haymes Woodcare Wood Cleaner to restore the timbers original appearance.
Adhesion test	[1] To check the adhesion of an existing coating, cut an 'X' lightly into the coating and firmly apply adhesive tape across the cut and then remove tape. If the tape removes the existing coating, remove all previous coatings before painting.

Surface Preparation

Compatibility test	[2] Test for compatibility with a previous coating by sanding and cleaning a small inconspicuous area. Apply 1 coat of the desired topcoat and allow to dry. After 24 hours, conduct an adhesion test. If the tape removes the coating, remove all previous coatings before painting. It is recommended to conduct the compatibility test in several areas.
Water penetration test	Sprinkle water onto the dry surface. If water penetrates the surface, the timber is ready for coating. If water beads and does not penetrate the surface, repeat the cleaning process and conduct the test again. Continue the process until water does not bead on the surface.
IMPORTANT:	You must consult the installation guide of the construction product you are using for information on coatings and finishing guide to determine product suitability prior to commencing work. For further information and product specification consult a Haymes Paint representative on 1800 033 431.

Application

- NOTE: To extend the life of the coating, select a colour that closely resembles the timber you are coating. Appropriate preparation is vital to the performance and longevity of this product.
- Stir thoroughly before and during use with a broad, flat stirrer.
- Apply first coat by brush or lambswool applicator at the recommended coverage rate and in the direction of the grain. Apply to three to four boards at a time and maintain a wet edge to ensure a smooth, even finish. Apply adequate product to end grain and all edges.
- Allow to dry for a minimum of six hours.
- Apply second coat, using the method outlined above.
- Apply third coat as required. Allow a minimum six hours drying time between coats.

Thinning

Thinning is not recommended.

Care and Maintenance

Protect the finish against abrasive contact, such as heavy foot traffic and moving furniture for seven days. Regularly inspect the surface for signs of wear and deterioration and recoat at first observation. Clean the surface periodically with detergent, using a mild dilution mixed with warm water. Apply with a mop or soft bristle broom to clean and then rinse thoroughly with clean water.

Storage

Read the Safety Data Sheet (SDS) for this product for specific directions on storage (section 7 of the SDS) and transport (section 10 of the SDS). To obtain a copy of the SDS, go to the Haymes Paint website, <https://www.haymespaint.com.au/products/technical/product-data-sheets-and-safety-data-sheets/>, or contact Haymes Service Express on 1800 033 431. Containers must be secured and stored upright during transit. Protect from extremes of temperature. Store in a cool, dry, well-ventilated place and out of direct sunlight. Check regularly for leaks. Ensure the container label remains legible for future identification and usage.

Safety & First Aid

Read the Safety Data Sheet (SDS) for this product, prior to using this product. The SDS contains important information on how to use this product safely including hazards and precautions, personal protective equipment, storage and first aid in the event of an emergency. To obtain a copy of the SDS, go to the Haymes Paint website, <https://www.haymespaint.com.au/products/technical/product-data-sheets-and-safety-data-sheets/>, or contact Haymes Service Express on 1800 033 431.

If the product is swallowed, phone the Poisons Information Centre on 13 11 26 or contact a Doctor. Keep out of reach of children. Flammable liquid and vapour. Harmful if inhaled. May cause drowsiness or dizziness. Avoid breathing vapours. Only use this product in a well ventilated space and away from ignition sources. Avoid contact with skin and eyes. Wear suitable, protective clothing, eye protection and impervious gloves when mixing and using.

Protect our Environment

Do NOT pour any leftover product down the drain. Retain in a marked, sealed container for future use or disposal via chemical waste collection programs such as Paintback®. Visit www.paintback.com.au for details of your nearest depot. Dried empty containers can be recycled and should be disposed of via recycling facilities.

Manufacturer's comment

This product has been designed as part of an integrated application system. Use with any other manufacturer's product(s) or failing to follow application instructions, could result in detrimental effects on product performance, for which Henry Haymes Pty. Ltd. cannot be held responsible. Important safety information is available on the Safety Data Sheet available from Haymes Paint website www.haymespaint.com.au. Further information about other Haymes products recommended to be used in conjunction with this product are available from the website in the form of Product Data Sheets in relation to those products. We are continually updating materials and methods, so please ensure you have the latest information on the Haymes Paint website.

Disclaimer

The information provided in this Product Data Sheet is correct at the time of preparation, but is subject to change. It is your responsibility to check the Haymes Paint website at www.haymespaint.com.au to ensure that you have the most current Product Data Sheet. Product application and performance is affected by environmental conditions at the time of application and drying. Paint applied in conditions outside of what is recommended may dry more slowly or be less durable, or produce a less uniform appearance.

Version

Version and Date Issued	Version 2.0 Date 10/08/2021
Supersedes	Version 1.0 Date 19/02/2018

Henry Haymes Pty Ltd
A.B.N. 14 004 201 638
Waringa Drive
Wendouree Industrial Park
Ballarat Vic 3355
Freecall 1800 033 431
www.haymespaint.com.au